


MT10R

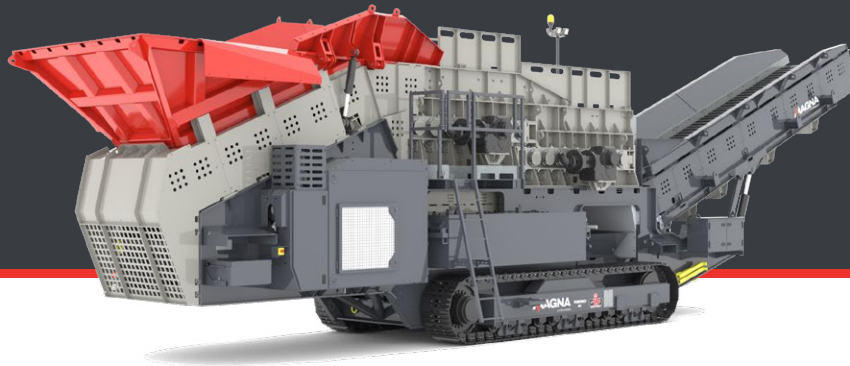

HOPPER / FEEDER

Hopper type:	Fixed feed hopper, with optional manual extensions
Hopper capacity:	4m ³ (5.3 yd ³) / 7m ³ (9.2 yd ³)
Hopper body:	Abrasion resistant feed hopper with optional extension available
Apron feed conveyor:	1000mm (39")

ROLLER GRIZZLY

Gap setting range:	40mm - 80mm
Configuration:	1 set of 8 or 10 rollers 2 sets of 8 (standard) or 10 rollers 2 sets of 5 rollers

OUTPUT POTENTIAL

Up to 300tph / 331 US tph depending on application

POWER UNIT

Tier 3 / Tier 4F / STAGE V:	CAT 7.1 (up to 161kW / 216hp)
------------------------------------	----------------------------------

CONVEYORS

Apron conveyor width:	1000mm (39")
Discharge height:	4.4m - 5.2m (14' 5" - 17')

TRANSPORT (Dimensions)

Length:	1 roller configuration: 13m - 15m (42' 8" - 49' 3") 2 roller configuration: 16m - 18m (52' 6" - 59')
Width:	3.1m (10')
Height:	3.6m (11' 9")
Weight operating:	55,000 - 62,000kg (121,254 - 136,686lbs)
Weight transport:	53,000 - 60,000kg (116,844 - 132,277lbs)