


MT130I

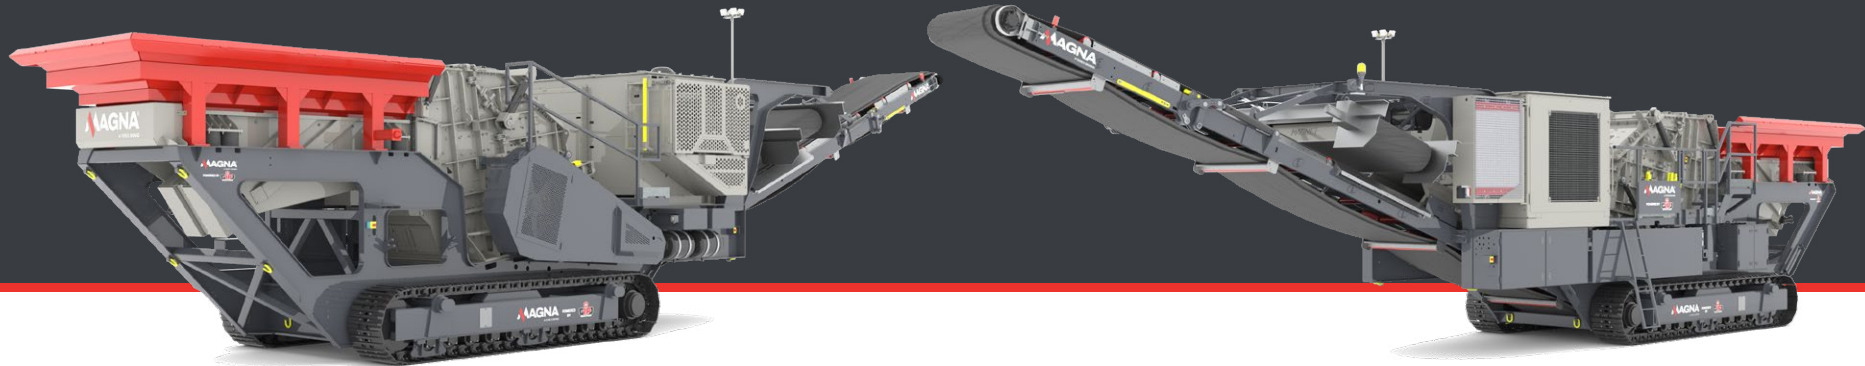

HOPPER / FEEDER

- Hopper type:** Fixed feed hopper or hydraulically foldable locking from ground level
- Hopper capacity:** 6.3m³ (8.24 yd³) / 10m³ (13 yd³)
- Hopper body:** Abrasion resistant feed hopper with optional extension available

PRE-SCREEN (OPTIONAL)

- Screen type:** Double deck
- Dimensions:** 1200mm x 2225mm (47" x 87") or 1200mm x 3160mm (47" x 125")

IMPACT CRUSHER

- Crusher inlet:** 1270mm x 925mm (50" x 36")
- Rotor diameter:** 1300mm (51")

OUTPUT POTENTIAL

Up to 600tph / 661 US tph depending on application

POWER UNIT

- Tier 3 / Tier 4F / STAGE V:** CAT C15 / SCANIA DC16 (up to 450kW / 600hp)

CONVEYORS

- Product conveyor width:** 1600mm (63")
- Discharge height:** 3.8m – 6.0m (12' 5" – 19' 7")

TRANSPORT (Dimensions)

- Length:** 18.7m (61' 4")
- Width:** 3.3m (10' 9")
- Height:** 3.8m (12' 9")
- Weight operating:** 64,000 - 67,000kg (141,000 – 147,700lbs)
- Weight transport:** 62,000 - 65,000kg (136,686 – 143,300lbs)