


# MT150I

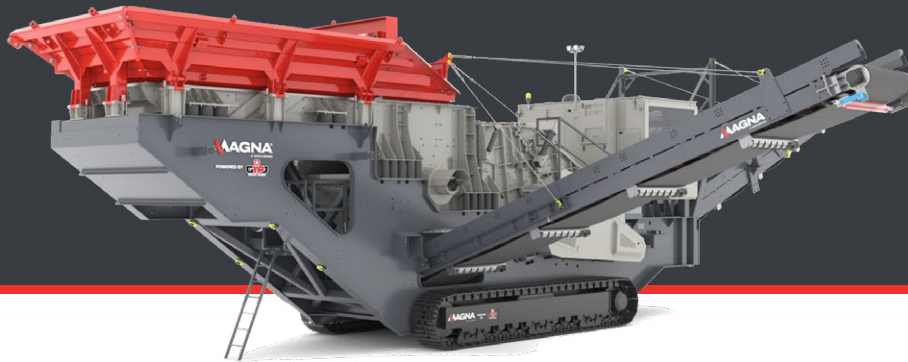

## HOPPER / FEEDER

- Hopper type:** Fixed feed hopper or hydraulically foldable locking from ground level
- Hopper capacity:** 8m<sup>3</sup> (10.46 yd<sup>3</sup>) / 15m<sup>3</sup> (19.61 yd<sup>3</sup>)
- Hopper body:** Abrasion resistant feed hopper with optional extension available

## PRE-SCREEN (OPTIONAL)

- Screen type:** Double deck
- Dimensions:** 1430mm x 2100mm (56" x 83") or 1430mm x 3160mm (56" x 125")

## IMPACT CRUSHER

- Crusher inlet:** 1500mm x 925mm (59" x 36")
- Rotor diameter:** 1300mm (51")

## OUTPUT POTENTIAL

Up to 800tph / 881 US tph depending on application

## POWER UNIT

- Tier 3 / Tier 4F / STAGE V:** CAT C18 / SCANIA DC16 (up to 565kW / 750hp)

## CONVEYORS

- Product conveyor width:** 1600mm (63")
- Discharge height:** 3.8m – 6.0m (12' 5" – 19' 7")

## TRANSPORT (Dimensions)

- Length:** 16.6m (54' 5")
- Width:** 3.5m (11' 5")
- Height:** 4.1m (13' 5")
- Weight operating:** 71,000 - 80,000kg (156,528 – 176,369lbs)
- Weight transport:** 62,000 - 68,000kg (136,686 – 149,914lbs)