


# MT150I SR

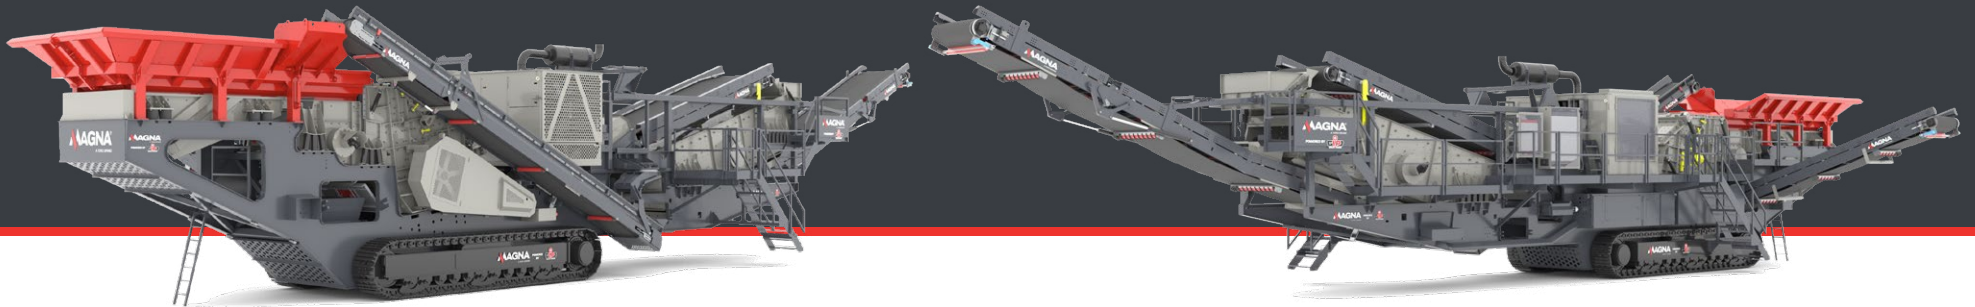

## HOPPER / FEEDER

<b>Hopper type:</b>	Fixed feed hopper or hydraulically foldable locking from ground level
<b>Hopper capacity:</b>	8.3m <sup>3</sup> (10.46 yd <sup>3</sup> ) / 15m <sup>3</sup> (19.61 yd <sup>3</sup> )
<b>Hopper body:</b>	Abrasion resistant feed hopper with optional extension available

## PRE-SCREEN (OPTIONAL)

<b>Screen type:</b>	Double deck
<b>Dimensions:</b>	1430mm x 2100mm (56" x 83") or 1430mm x 3160mm (56" x 125")

## IMPACT CRUSHER

<b>Crusher inlet:</b>	1500mm x 925mm (59" x 36")
<b>Rotor diameter:</b>	1300mm (51")

## FINAL SCREENING

<b>Screen type:</b>	2 or 3 deck options
<b>Screen size:</b>	6500mm x 2000mm (21' 4" x 6' 6")

## OUTPUT POTENTIAL

Up to 800tph / 881 US tph depending on application

## POWER UNIT

<b>Tier 3 / Tier 4F / STG V:</b>	CAT C18 / SCANIA DC16 (up to 565kW / 750hp)
----------------------------------	--

## CONVEYORS

<b>Product conveyor width:</b>	1600mm (63")
<b>Under screen conveyor:</b>	1600mm (63")
<b>Discharge height final product conveyor:</b>	3.5m – 5.2m (11' 5" – 17')

## TRANSPORT (Dimensions)

<b>Length:</b>	26m–30m (85' – 98' 5") depending on configuration
<b>Width:</b>	3.5m (11' 5")
<b>Height:</b>	4.1m (13' 5")
<b>Weight operating:</b>	100,000 – 220,000kg (220,462 – 485,016lbs)
<b>Weight transport:</b>	72,000 – 90,000kg (158,732 – 198,416lbs)