


# MT170I SR

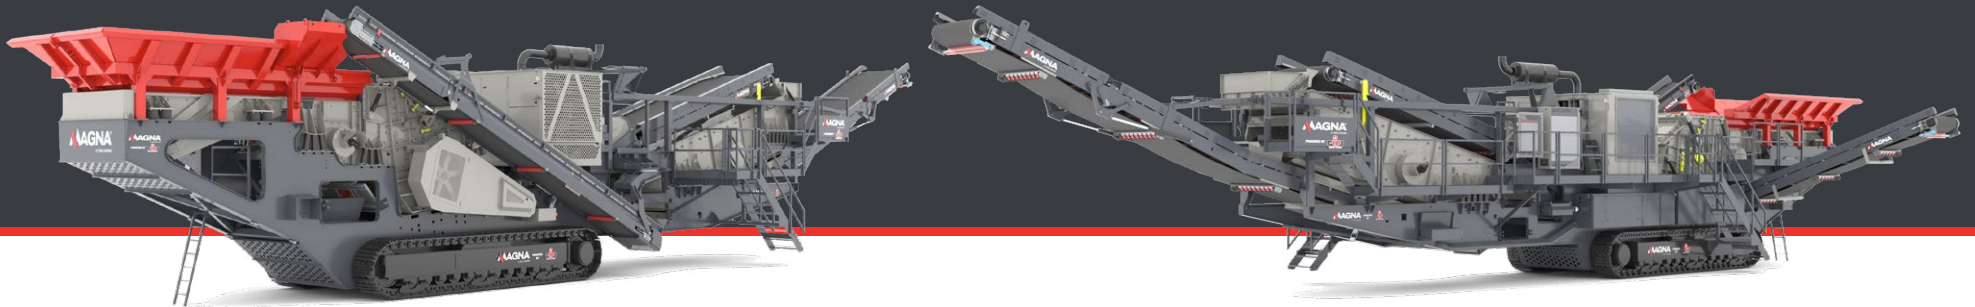

## HOPPER / FEEDER

<b>Hopper type:</b>	Fixed feed hopper or hydraulically foldable locking from ground level
<b>Hopper capacity:</b>	9m <sup>3</sup> (11.8 yd <sup>3</sup> ) / 18m <sup>3</sup> (23.5 yd <sup>3</sup> )
<b>Hopper body:</b>	Abrasion resistant feed hopper with optional extension available

## PRE-SCREEN (OPTIONAL)

<b>Screen type:</b>	Double deck
<b>Dimensions:</b>	1670mm x 3300mm (65" x 130")

## IMPACT CRUSHER

<b>Crusher inlet:</b>	1670mm x 925mm (66" x 36")
<b>Rotor diameter:</b>	1300mm (51")
<b>Rotor diameter optional:</b>	1400mm (55")

## FINAL SCREENING

<b>Screen type:</b>	2 or 3 deck options
<b>Screen size:</b>	7500mm x 2000mm (24' 6" x 6' 6")

## OUTPUT POTENTIAL

Up to 1100tph / 1232 US tph depending on application

## POWER UNIT

<b>Tier 3 / Tier 4F / STAGE V:</b>	CAT C27 (up to 746kW / 1000hp)
------------------------------------	-----------------------------------

## CONVEYORS

<b>Product conveyor width:</b>	1800mm (71")
<b>Under screen conveyor:</b>	1600mm (63")
<b>Discharge height final product conveyor:</b>	3.5m – 5.2m (11' 5" – 17')

## TRANSPORT (Dimensions)

<b>Length:</b>	27m-32m (88' 6"- 105') depending on configuration
<b>Width:</b>	3.6m (11' 9")
<b>Height:</b>	4.2m (13' 8")
<b>Weight operating:</b>	135,000 - 240,000kg (297,624 – 529,109lbs)
<b>Weight transport:</b>	74,000 - 90,000kg (163,142 – 198,416lbs)